

VULKAN  
LOKING

# LOKPRESS

CORDLESS ASSEMBLY TOOL




---

# LOKPRESS

---

## LOKPRESS CORDLESS ASSEMBLY TOOL

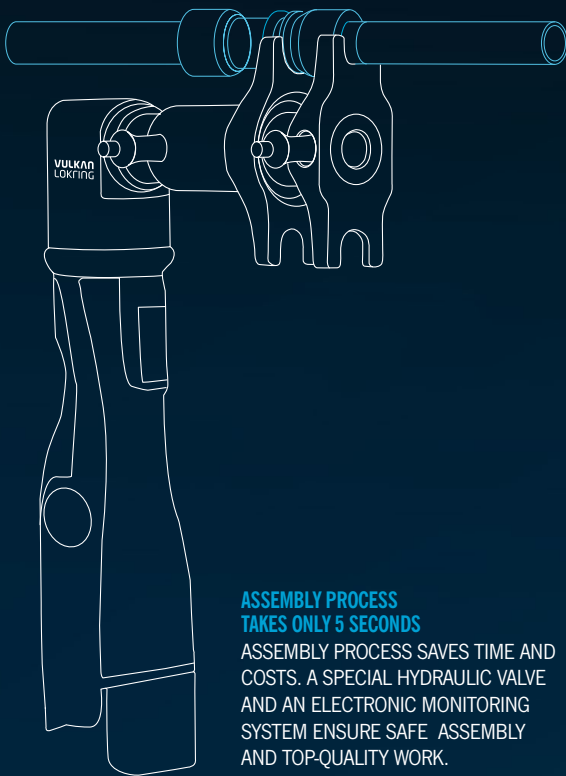


### ASSEMBLY PROCESS TAKES ONLY 5 SECONDS

ASSEMBLY PROCESS SAVES TIME AND COSTS. A SPECIAL HYDRAULIC VALVE AND AN ELECTRONIC MONITORING SYSTEM ENSURE SAFE ASSEMBLY AND TOP-QUALITY WORK.



**ROTATING HEAD CAN BE SWIVELLED THROUGH 360°**  
IDEAL FOR AREAS THAT ARE DIFFICULT TO ACCESS.

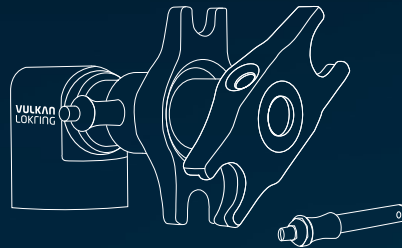

**FLEXIBLE REPLACEMENT OF THE ASSEMBLY JAWS**  
PREVENTS DELAYS IN THE WORKING PROCESS.

---

The compact assembly tool ensures the safe and fast installation of LOKRING tube connections. The steplessly rotatable assembly head and low weight guarantees one-handed operation and assembly in awkward installation positions. Modern high-performance rechargeable batteries ensure lots of connections can be made without interruption. When the diameter of the tubes to be connected changes, the assembly jaws are simply turned round or replaced in seconds.

# CORDLESS ASSEMBLY TOOL

**HIGH-PERFORMANCE RECHARGEABLE BATTERY**  
INTERRUPTION-FREE WORKING PROCESS

**STURDY HOUSING**

**ONE-HAND OPERATION**  
LOW WEIGHT  
(2.34 kg INCL. BATTERY)

**HIGH PRESSING FORCE**  
UP TO 23 kN



**ROTATABLE HEAD**  
EASY WORK IN CRAMPED INSTALLATION SITUATIONS

**1 ASSEMBLY JAW = 2 SIZES**  
MINIMUM EFFORT REQUIRED TO CHANGE TOOL

## CORDLESS ASSEMBLY TOOL



- ⊕ Special hydraulic valve for quick and safe assembling of LOKRING connections type 50.
- ⊕ Diameters: 6 to 41.3 mm (1/4" to 1 5/8")
- ⊕ Lightweight for single-hand operation.
- ⊕ Rotatable mounting head makes working in any situation easy.
- ⊕ Delivered in a robust plastic case.
- ⊕ Made in Germany!

Article no.	Article name
L14003952	LOKTOOL LOKPRESS

### Technical data


Dimensions without rechargeable battery (H x W x L):	330 x 69 x 219 mm
Operating temperature:	-10°C to 50°C (14°F to 122°F)
Power consumption:	240 W
Pressing force:	up to 23 kN
Rechargeable battery:	12V / 2.0 Ah Li-Ion
Recharge time:	30 to 60 min
Weight (incl. rechargeable battery):	2.34 kg (5.16 lb)
Protection class:	IP20

### Scope of supply

Article no.	Article name	Description
L13005424	LOKPRESS MB 06-10mm	1 pair of assembly jaws
L13005714	LOKPRESS MB 12-16mm	1 pair of assembly jaws
L13005715	LOKPRESS MB 18-22mm	1 pair of assembly jaws
L13005716	LOKPRESS MB 28-35mm	1 pair of assembly jaws
L14004026	LOKPRESS RB	Rechargeable battery
L14004183	LOKPRESS BC	Battery charger

### Also available separately

Article no.	Article name	Description
L13006052	LOKPRESS MB 25,4/42mm	1 pair of assembly jaws

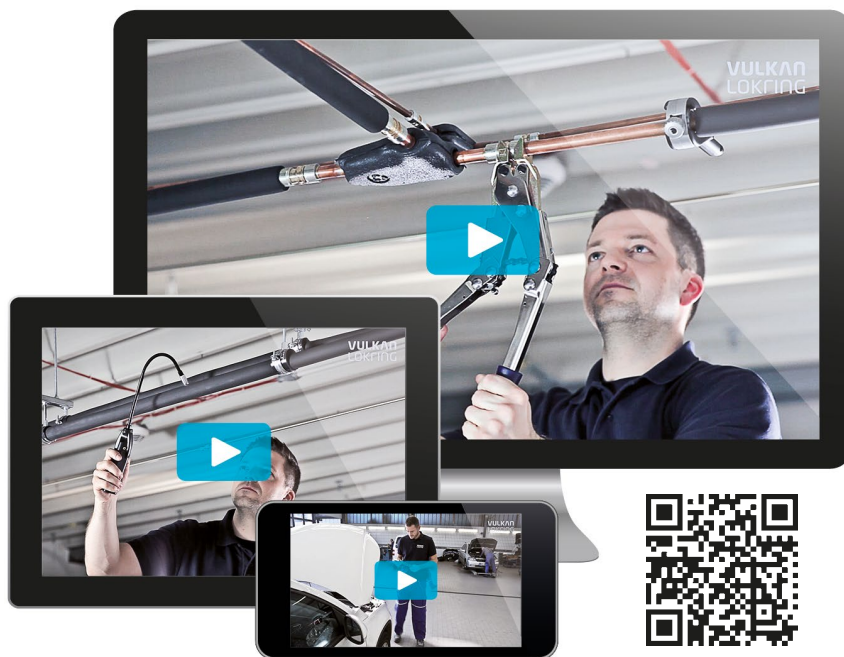

[www.vulkan.com/en-us/lokring/videos/](http://www.vulkan.com/en-us/lokring/videos/)